



NPX1240G (12V40AH)

Applications

- Uninterruptible Power Supply (UPS)
- Electric Power System (EPS)
- Emergency Light
- Golf cart, Electric vehicle
- Railway signal system
- Marine and power stations
- Aircraft signal system
- Alarm and security system
- Electronic apparatus and equipment
- Electric powered bicycle & Wheelchair
- Communication power supply
- Solar powered systems

Battery Construction

COMPONENT	POSITIVE PLATE	NEGATIVE PLATE	CONTAINER	COVER	SAFETY VALVE	TERMINAL	SEPARATOR	ELECTROLYTE
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Colloidal silicon

Performance Characteristics


- **Nominal Voltage** 12V
- **Number of Cell** 6
- **Nominal Capacity (77°F /25°C)**
 - 100 Hour rate (0.48A, 11.1V) 48Ah
 - 20 Hour rate (2.0A, 10.8V) 40Ah
 - 10 Hour rate (3.7A, 10.5V) 37Ah
 - 1 Hour rate (22A, 9.6V) 22Ah
- **Internal Resistance**
 - Fully charged battery (77°F /25°C) 12mΩ
- **Operating Temperature Range**
 - Discharge -20 ~ 65°C
 - Charge -10 ~ 65°C
 - Store -20 ~ 65°C
- **Self-Discharge 68°F (20°C)**
 - Capacity declined per month average 3%
- **Max. discharge current 77°F /25°C** 400A(5S)
- **Charge Methods: constant voltage charge 77°F /25°C**
 - Cycle use 14.28 ~ 14.52V
 - Max. Current 10A
 - Standby use 13.38 ~ 13.68V

General Features

- **Micro millimeter SiO₂ and H₂SO₄ technology for efficient gas recombination of up to 99%.**
- **Maintenance free and no water adding required.**
- **Not restricted for air transportation as Nollon Battery complies with IATA/ICAO special provision A67.**
- **Raw material used in Nollon battery is of CE and UL (MH49077) standards.**
- **Computer designed lead-calcium tin plate grid alloy provides high power density and less gassing.**
- **ABS case (optional for Fire Retardant case).**
- **Low self-discharge and good recovery from deep discharge.**
- **Spill/leak proof and vibration resistant.**
- **Long service life for float or cyclic applications.**
- **Design life 10 years**

Dimensions and Weight

Type	Length	Width	Height	Total Height	Approx. Weight
SI Units	197mm	165mm	170mm	170mm	13Kg
English Units	7.76inch	6.5inch	6.69 inch	6.69inch	28.6lbs

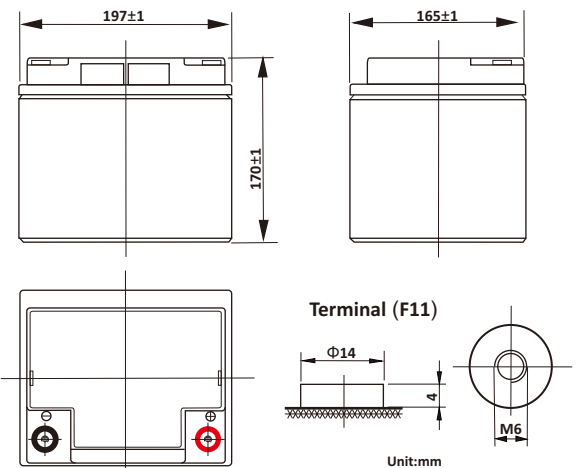

Constant Current Discharge (Amperes at 77°F/25°C)

V/cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60	123	87.4	68.4	39.9	22.0	10.1	6.85	3.85	2.11
1.65	116	83.0	65.8	38.6	21.1	10.0	6.80	3.80	2.09
1.70	112	78.5	63.1	37.1	20.1	9.90	6.70	3.75	2.07
1.75	103	74.1	60.0	35.3	19.0	9.75	6.60	3.70	2.05
1.80	95.0	67.4	55.1	33.1	17.9	9.60	6.40	3.60	2.00

Constant Power Discharge (Watts/cell at 77°F/25°C)

V/cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60	228	161	128	84.7	63.1	50.3	28.3	20.4	13.7
1.65	214	154	123	80.9	60.3	48.9	27.3	19.7	13.4
1.70	200	146	117	77.1	57.4	47.5	26.4	19.1	13.0
1.75	186	138	112	73.1	54.1	46.0	25.2	18.4	12.6
1.80	171	129	104	68.4	50.3	43.2	23.8	17.5	12.1

(Note: The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.)



